






# Profile UTV



## Cladding

-  Thermally modified
-  For exterior and interior use
-  Conventional and easy installation
-  100% natural, reusable
-  High dimensional stability, long-lasting

## Additional Features



T&G END-MATCHING, EXCL AYOUS



FIRE-RETARDANT IMPREGNATION



FINISHING



BRUSHED




Thermal modification is a 100% natural method for increasing the durability and dimensional stability of wood, likewise for reducing water absorption. During the process, the wood is heated to a temperature of 180-220°C, while lowering the moisture content of the wood up to 4-6 %. Thermoarena conducts careful quality control of the wood before and after thermal modification. The lumber used for TM is checked and certified.


# CLADDING

## Technical data

Profile	UTV	Coverage m/m <sup>2</sup>	in pack m/m <sup>3</sup>
ayous	20 x 92	12,20	543
ayous	20 x 140	7,69	357
pine	20 x 92	12,20	543
pine	20 x 117	9,35	427
pine	20 x 140	7,69	357
Length:	Pine 1.8 - 5.1 m Ayous 2.1 - 4.5 m		

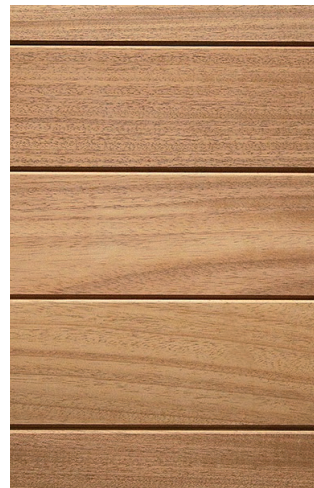

ayous

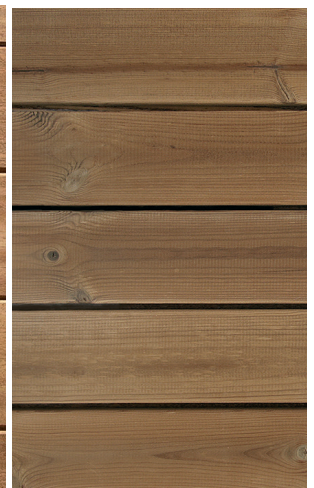

pine

Please follow Thermoarena's installation instructions when working with thermal wood



 **Thermoarena**

Thermoarena OÜ, Farmi tee 5, Koigi küla, Järva maakond, 72501  
Telefon +372 509 6803, info@thermoarena.com, thermoarena.com



The mark of  
responsible forestry  
FSC® C114364

